


Innovation and efficiency, together

At MYK Arment®, we set standards of excellence and trust in the global construction chemical industry. The cornerstone of our business is formulated around the belief that the industry expects much more than just the product/service. Hence, our products and services are engineered for:

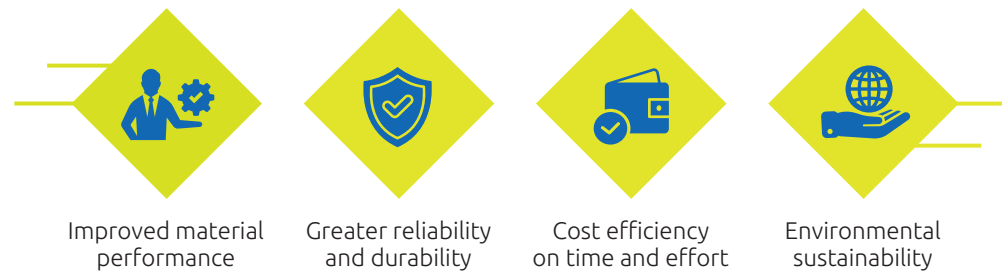

We constantly strive to raise the bar on the above parameters through innovation on our offerings by working closely with our customers to identify what they need most-whether it's innovative product development, greater efficiency or application expertise. Together with the customer, we make sure that every interaction is a step in our journey towards excellence.

Our service is backed by our strong relationships with architects, contractors, specifiers, building material suppliers and concrete producers who offer high quality products and industry leading technical support.

Our products offer a unique blend of German technology and expertise to serve Indian and global markets. MYK Arment's range of high-performance construction chemical products include:



Seamless and Durable Solution for Extreme Conditions



AquaArm Gepotech H

AquaArm Gepotech H is a hybrid polyurea/polyurethane system that delivers advantages of seamless coating, longer life cycles and durability. Specifically designed as a waterproofing and protective coating, it is a two-component, spray-applied, 100% solid, flexible, rapid curing system. Its two components being ISO and POLYOL offer excellent surface and physical properties.

Flexible, rapid curing system


Areas of application

The product has anti-corrosive, waterproofing and protective properties with a wide range of applications in concrete and steel structures. Some of the common applications include:

- Below-the-ground waterproofing
- Tank coating
- Waste water tank lining
- Landscape and water containment
- Theme parks and decorative designs
- Refineries
- Truck bed lining
- Waterparks and playgrounds
- Airports
- Pipe/ Pipeline coating
- Bridge/bridge deck waterproofing
- Roof waterproofing
- Rail car
- Secondary containment
- Marine environment
- Aquarium lining
- Line striping
- Podium

Advantages

AquaArm Gepotech H physical and chemical properties deliver a host of advantages

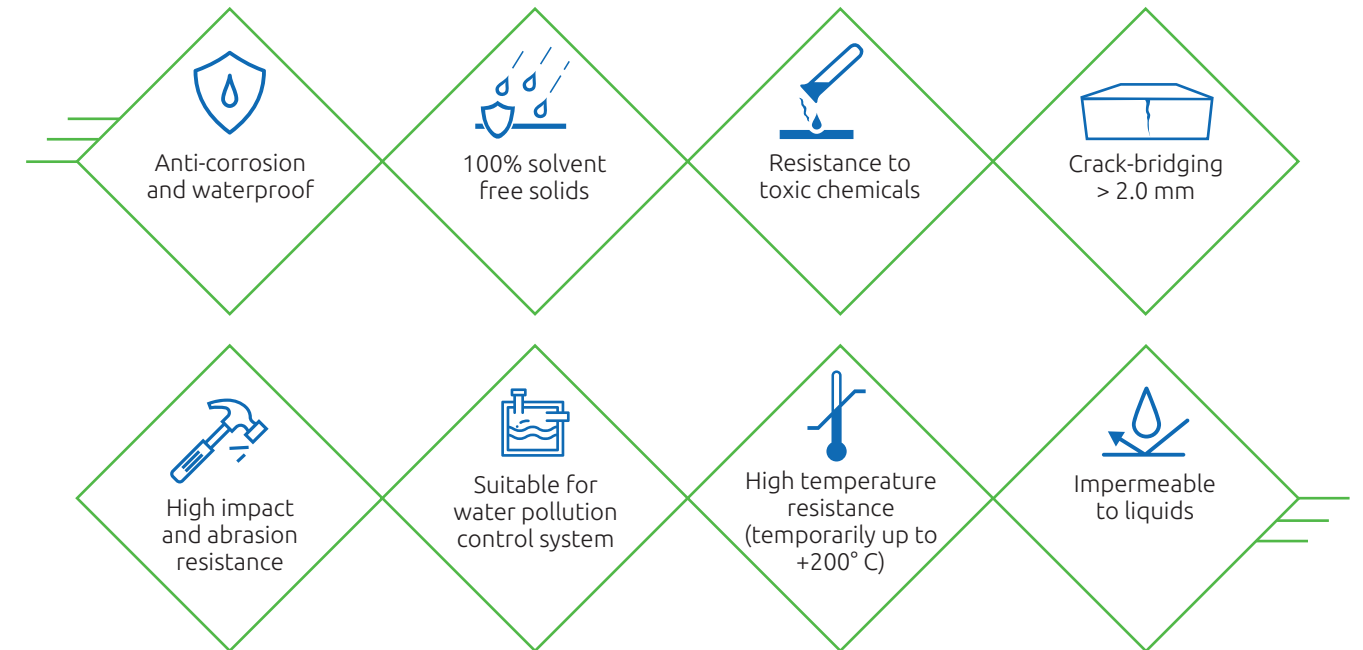

Properties

Property	Unit	Value	Test Method
Hardness	Shore A	80-95	DIN 53505
Tensile Strength	Mpa	>16	DIN 53504
Elongation	%	>500	DIN 53504
Tear Strength	Kg/cm	>70	ASTM D624
Pot life	Seconds	10± 2	Q/S-1020-QC
Density of Part-A	g/cm ³	1.03 ± 0.05	DIN 51757
Density of Part-B	g/cm ³	1.08± 0.05	DIN 51757
Viscosity of Part- A	cps	1000 ± 200	Q/S-1032-QC
Viscosity of Part-B	cps	1250 ±200	Q/S-1032-QC

